
ATM-LEVAGE
Location de grues & mini grues

ISOTRACK M

HEAVY DUTY TEMPORARY ACCESS AND GROUND PROTECTION MAT

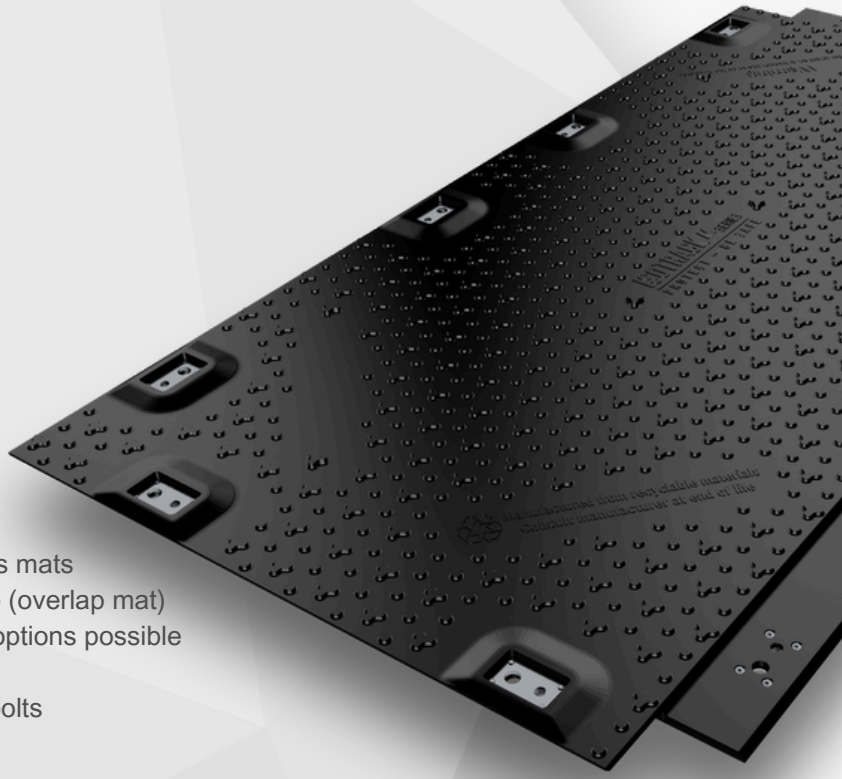

KEY ADVANTAGES

- Lightweight / manhandable
- Heavy duty application
- Overlap system ensures good load transfer across mats
- Reduced risk of mud pushing up onto mat surface (overlap mat)
- Both brickwork (offset) and orthogonal assembly options possible
- Robust metal connection design
- Connection from both sides using standard M12 bolts

General information	
Overall Dimensions (mm)	1906 x 1000
Thickness (mm)	Total 33 mm, Core 25
Usable Surface Area (m2)	1,63
Weight (kg)	43 +/- 1
Material	Recycled HDPE
Colour	Black (standard) Other colours optional subject to minimum order quantity
Transport	Open top standard high cube 40'container 440 mats, Mega Truck standard EU 540 mats
Handling and Installation	Two-person lift, no specialist tools or equipment required
Connection	Standard M12 bolts, metal connectors are integrated in the plate
Recycling	100 % recyclable
Safety	Surface structure designs provide excellent traction for vehicles
Environmental	No liquid absorption and chemically inert. Easy to clean/decontaminate.
Load Bearing Capacity	Up to 130 tonnes*
Fire Rating	UL 94HB

*Load bearing capacity is dependent on ground conditions.

atmlevage@groupeatm.fr
atmlevage@groupeatm.fr
06 03 00 44 76